Uniden EXP 371 Teardown

Uniden EXP 371

Written By: Tim Reimer



INTRODUCTION

This guide will help you to completely disassemble your phone in order to perform other repairs.

TOOLS:

- Phillips #1 Screwdriver (1)
- iFixit Opening Tools (1)

Step 1 — Uniden EXP 371 Teardown



- Uniden EXP371 900 MHz Cordless Phone.
- 900 MHz Extended Range with One Touch RocketDial/Find Handset Locator and is Desk or Wall Mountable.

Step 2





- Remove the battery by first pressing down on the rear of the cover and pushing the cover towards the bottom of the phone.
- Next remove the battery by pulling on the connector.


Step 3







- Next remove the two screws at the bottom of the phone with a PH1 philips screwdriver.
- Now remove the top portion of the case from the bottom. This may be difficult to do with your bare hands. The use of a plastic opening tool may come in handy.

Step 4

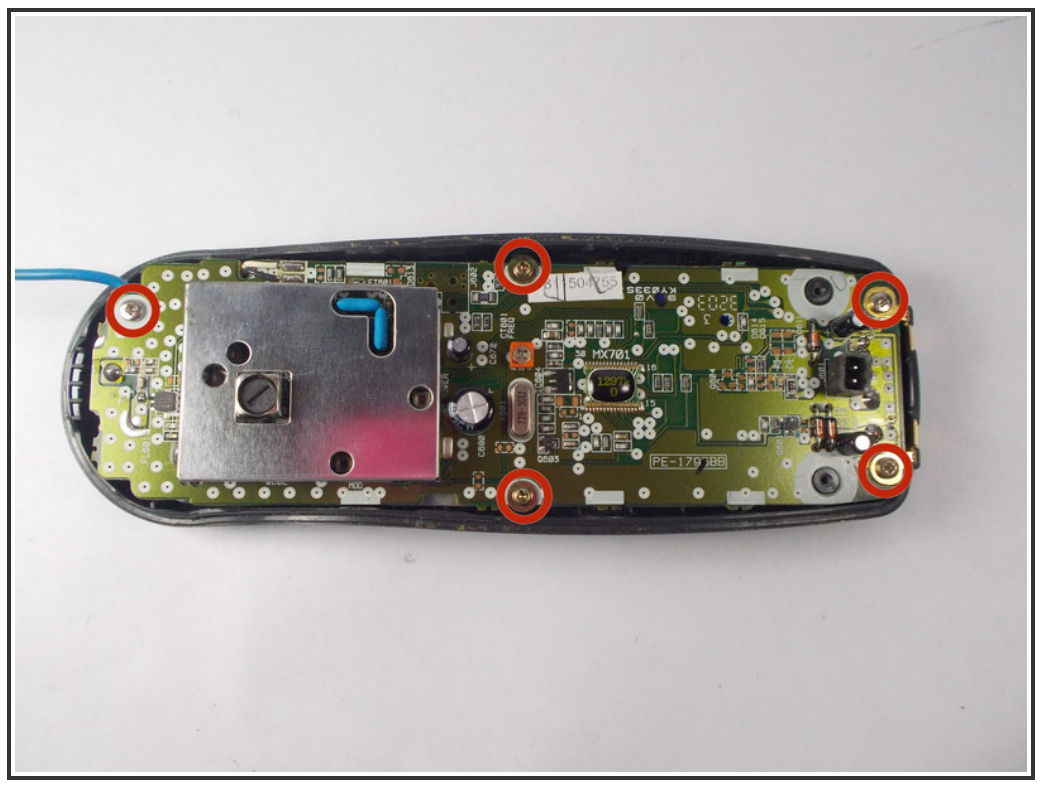

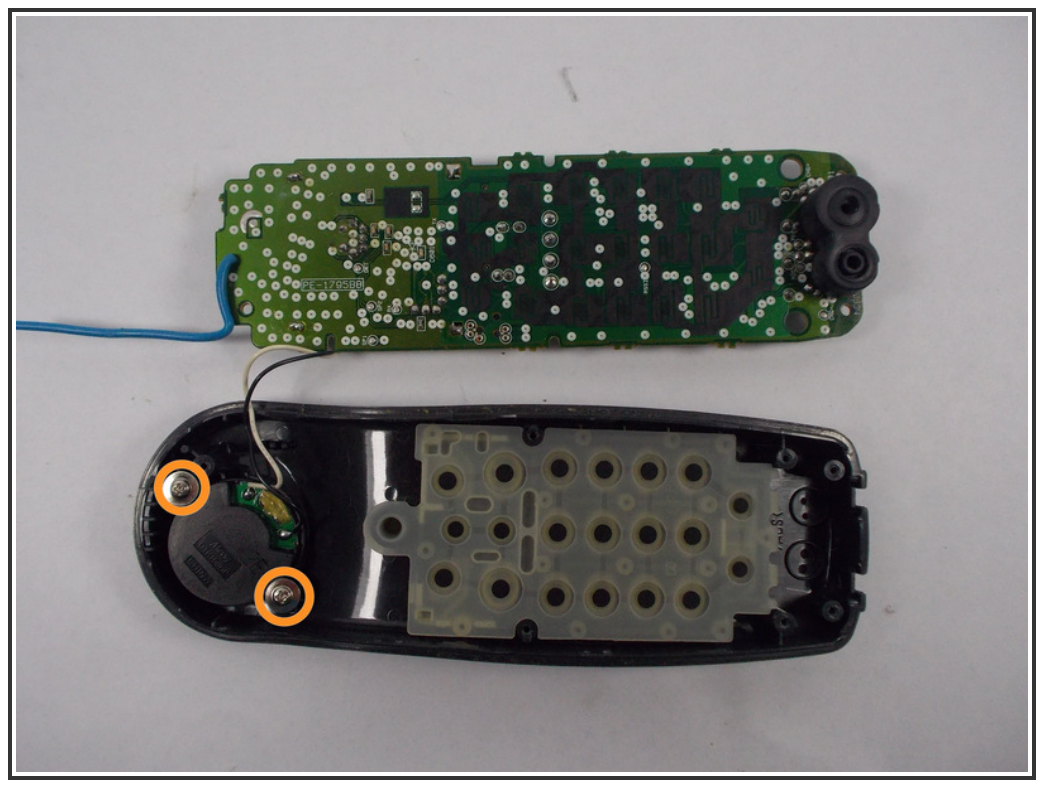

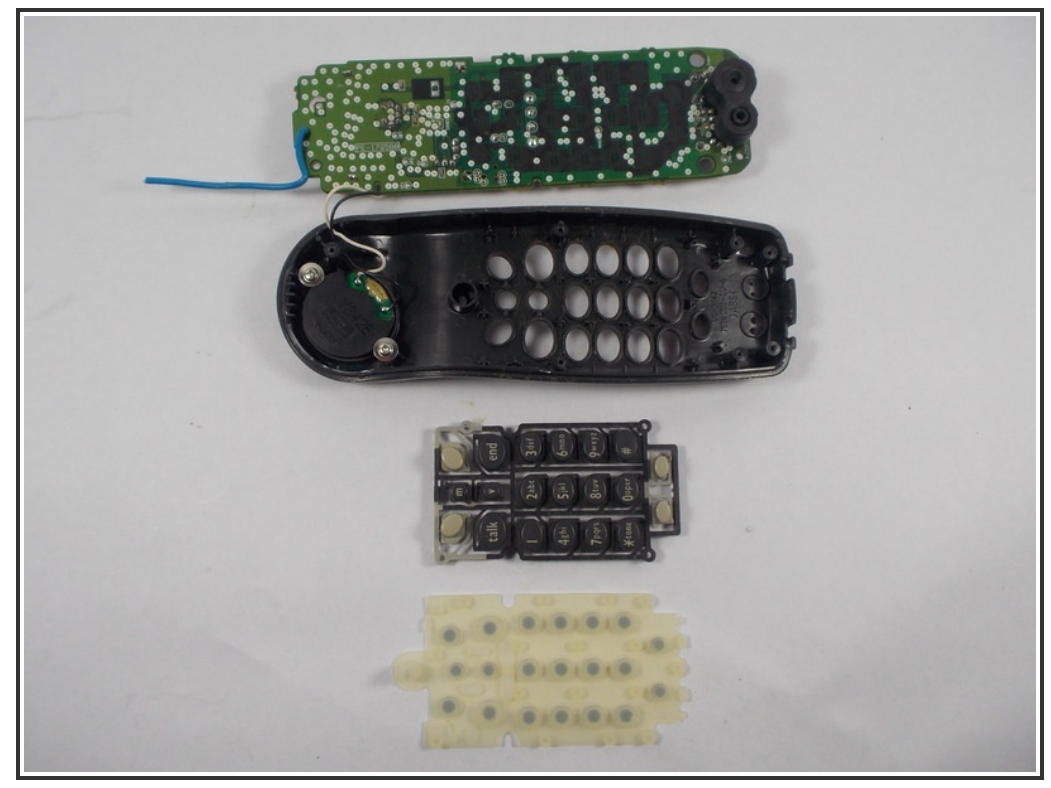

- Your next step is to remove the five screws holding down the motherboard. Use the PH1 philips screwdriver.
- Once you have removed the five screws you may lift the motherboard off of the front case.
- At this point you may also remove the dial pad. It simply lifts off.
- You may also remove the speaker if needed by unscrewing the two screws using the PH1 philips screwdriver.
- The whole phone is now disassembled at this point.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-16 07:19:48 PM.